



Overview

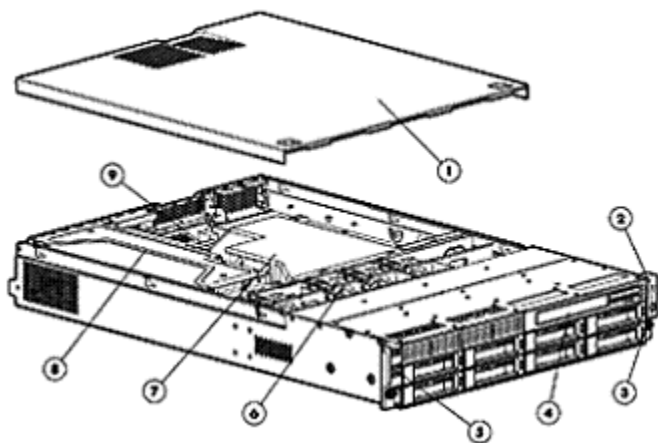

Front View:

- 1. Access panel
- 2. Front LED Indicators
- 3. Power on/off
- 4. Optional DVD-RW or DVD-ROM drive
- 5. Front USB Ports (2)
- 6. Non-Hot Plug Non Redundant fans (4 fans)
- 7. Air Baffle
- 8. PCI Cage
- 9. System Board

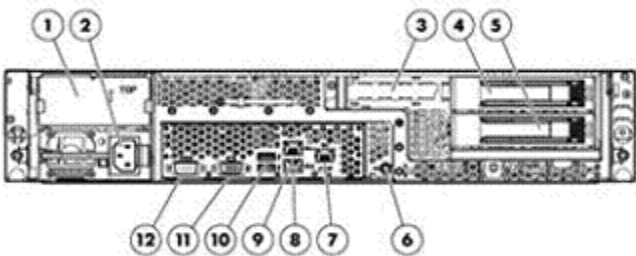

Rear View:

- 1. Redundant Power Supply Bay (Optional)
- 2. Power Supply Cable Socket
- 3. Low Profile Card Slot
- 4. PCI Expansion Card Slot
- 5. PCI Expansion Card Slot
- 6. UID LED Button
- 7. (Optional) LO100i 10/100 Mbps LAN port for IPMI management (RJ-45)
- 8. LAN Port
- 9. LAN Port
- 10. 2 Rear USB 2.0 Ports
- 11. VGA Port
- 12. Serial Port

What's New

- Support for NC375T PCI Express Quad Port Gigabit Server Adapter

At A Glance

The HP ProLiant DL180 G6 is a low cost high capacity storage optimized 2-way server that delivers on a history of design excellence and 2U density for a variety of rack deployments and applications.

- Processors:
    - Supports up to two Quad-Core Intel® Xeon® processors: 5500 sequence with 8MB Level 3 cache
    - Intel® 5520 Chipset
  - Memory:
    - Up to 12 DIMM slots
    - Up to 192GB, using 16GB Quad-Rank PC3-8500R-7 DDR3 Registered (RDIMM) memory, operating at 800MHz when fully populated at 2 DIMMs per Channel in 12 slots
    - Up to 96GB, using PC3-10600R DDR3Registered (RDIMM) memory, operating at 1066MHz when fully populated at 2 DIMMs per Channel in 12 slots.
      - Up to 24GB, using PC3-10600E DDR3 Unbuffered (UDIMM) memory, operating at 1066MHz when fully populated at 2 DIMMs per Channel in 12 slots
- [NOTE: Half DIMM slots are available when one processor is installed.](#)
- Internal Drive Support:



## Overview

- Support for up to twenty-five (25) SFF with a Smart Array controller.
- Support for up to fourteen (14) LFF with a Smart Array controller:
  - Hot Plug Serial ATA (SATA) Models: Up to 14.0TB (14 x 1TB Hot Plug 3.5" hard drives)
  - Hot Plug Serial Attached SCSI (SAS) Models: SAS Model: Up to 14.0TB (14 x 1TB Hot Plug 3.5" hard drives)

NOTE: Four (4), eight (8) and twelve (12) hard drives models are supported standard via BTO. Eight (8) and twelve (12) hard drive model support requires the addition of a Smart Array or HBA controller. Hot Plug and SAS functionality require the addition of a Smart Array or HBA controller.
- Network Controller:
  - HP NC362i Integrated Dual Port Gigabit Server Adapter
  - HP NC375T PCI Express Quad Port Gigabit Server Adapter
- Storage Controllers:
  - 4 HDD BTO Models: HP Embedded SATA RAID Controller RAID 0,1,10
 

NOTE: Embedded SATA controller support transfer rate up to 1.5Gb/s SATA

NOTE: To enable RAID on Embedded SATA, use the HP Smart Array B110i SATA Raid controller, To enable use of the B110i, enter the ROM based setup utility(RBSU). The option for enabling RAID can be found in the Advanced section of the RBSU
  - 8 HDD BTO Models: HP Smart Array P410 /256MB Controller (RAID 0/1/1+0/5/5+0)
  - 12 HDD BTO Models: HP Smart Array P212 /256MB Controller(RAID 0/1/1+0/5/5+0)
 

NOTE: A minimum of 256 MB cache, battery kit, and Smart Array Advanced Pack License Key upgrade is required to enable RAID 6, 6+0
- Internal Drive Support:
  - Standard model drive bays:
    - Four (4) 3.5"Large Form Factor (LFF) hot-plug drive bays supporting up to 6Gb/s SAS or 3Gb/s SATA transfer rate. NOTE: Embedded SATA controller support transfer rate up to 1.5Gb/s SATA. HP Smart Array P212 or P410 controller is required to achieve 6Gb/s SAS or 3Gb/s SATA transfer rate
    - Eight (8) 3.5" Large Form Factor (LFF) hot-plug drive bays supporting up to 6Gb/s SAS or 3Gb/s SATA transfer rate.
    - Twelve (12) 3.5" Large Form Factor (LFF) hot-plug drive bays supporting up to 3Gb/s SAS or 3Gb/s SATA transfer rate.
  - Optional drive bays:
    - Twenty Five (25) 2.5" Small Form Factor (SFF) hot-plug drive bays supporting up to 6Gb/s SAS or 3Gb/s SATA transfer rate.
    - Eight (8) 2.5" Small Form Factor (SFF) hot-plug drive bays supporting up to 6Gb/s SAS or 3Gb/s SATA transfer rate.
    - Rear Two (2) 3.5" Large Form Factor (LFF) hot-plug drive bays to use with 12LFF bays supporting up to 3Gb/s SAS or 3Gb/s SATA transfer rate. NOTE: Full Height/ Full Length Riser Option is not available when the Rear 2LFF drive bays is selected for the system.
 

NOTE: All Hard drive bay options except 4LFF require HP Smart Array P410 or P212 controller. NOTE: To achieve highest possible stated transfer rate please make sure the firmware on the drive bays (backplanes) and HP Smart Array controller up to date. Latest firmware are available to download from HP support web site.
  - Hard disk drives support:
    - Up to 14.0TB (14 x 1TB Hot Plug Serial-attached SCSI (SAS) or Serial ATA (SATA) drives 3.5" hard drives)
    - Up to 12.5 TB (25 x 500GB Hot Plug Serial-attached SCSI (SAS) or Serial ATA (SATA) drives 2.5" hard drives)
- Expansion Slots:
  - Up to Four (4) available PCI-Express Slots via the Three (3) PCIe Slot Riser
  - One available Low Profile x16 PCI-Express slot using a Low profile Riser
  - Two Full Height/ Full Length Riser options:
    - Option1: 2 PCIe2x8 full-length/full-height PCI-Express slots (Standard)
    - Option2: 2 PCI-X, full-length/full-height riser Slots(Optional)
    - Option 3: 1 PCIe2x16 full-length / full-height slot (Optional)
    - Option 4: 2 PCIe2x8 and 1 PClex8(4) full-length/full-height slots (Optional)

NOTE: Full Height/ Full Length Riser Option are not available when the Rear 2LFF drive bay is selected for the

## Overview

system.

- Redundancy:
  - Fully redundant non-hot plug fans (Optional)
  - Hot plug power supply with optional redundancy
- Power Sources:
  - Dual Common Slot Bay for Right Sized, Hot plug and Redundant Power
    - HP 750W CS HE Gold Power Supply (Standard on some models)
    - HP 460W CS HE Gold Power Supply (Standard on some models)
- Infrastructure Management:
  - With G6, ProLiant 100-series server administrators are able to deploy and monitor their servers using methods similar to 300 series servers and above. Agents and the Easy Set-up CD are available that provide a user experiences consistent with 300 series and above.
    - With Easy Set-up CD, customers get SmartStart "like" deployment tools that reduce the time required for server setup and updates. Easy Set-up CDs and their ISO images are provided with each ProLiant G6 100-series server and are used to perform assisted installations for one or two servers. Users performing multi-server installations involving large numbers of servers may require the following deployment tools:
      - SmartStart Scripting Toolkit - Automated scalable deployment utility
      - Smart Components - a self-executable software consisting of driver and firmware
    - With agents and providers, ProLiant 100 series servers get environmental monitoring that is similar and consistent to that of ProLiant 300 series servers and above. This server now offers the HP Insight Management Agents and HP Insight Management WBEM Providers, two well established sets of management and Internet standards technologies that provide capabilities which provide integration to HP Systems Insight Manager (SIM).
  - HP Insight Control for Linux, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, control and optimize your IT infrastructure through a single, simple management console. Insight Control for Linux supports Linux-based central management servers.
- Ports:
  - Five USB ports (two front, two rear , one optional internal)  
[NOTE: In order to utilize the internal USB port the USB cable \(P/N: 536769-B21\) must be connected to the internal USB header](#)
- Optical Drive:
  - Support for one (optional): DVD-ROM, DVD/CD RW  
[NOTE: In the 12LFF or 25SFF drives bay model Optical drives are required to be installed with rear option kit \(P/N 515826-B21\)](#)
- Form Factor:
  - 2U rack models
- Operating Systems and Virtualization Software:
  - Supports Windows, RHEL, SLES, Solaris, VMware, and Citrix Essentials for XenServer (Retail)
- Deployment/Serviceability:
  - HP ProLiant DL180 G6 models have fixed rails which provide support for racks with round mounting holes and tool-free support for racks with square mounting holes (including Compaq/HP 7000, 9000, 10000 and HP series), with an adjustment range of 26" - 36"
  - Tool-less access to all system components for easy in rack serviceability
  - Customer Self Repair (CSR): HP products are designed with many CSR parts to minimize repair time and allow for greater flexibility in performing defective parts replacement
- Warranty:
  - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and parts replacement is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.  
[NOTE: Server Warranty includes 3-Years Next Business Day Parts replacement, 0-Years Labor, 0-Years Onsite support. Additional information regarding worldwide limited warranty and technical support is available at:](#)

## Overview

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

NOTE: For the Standard Features shipped in the Factory Integrated Models, please see the "Configuration Information - Factory Integrated Models" section.

Processor	Quad-Core Processors
One of the following depending on Model	Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
	Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
	Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2)
	Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)
NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology.	
NOTE: Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 4, 3, 2, and 1 cores active.	
NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.	
NOTE: For the Intel 5500 Series, the letter preceding the model number indicates the performance/wattage of the processor. "X" denotes High Performance/Wattage; "E" denotes Enterprise Performance/Wattage (Mainstream); and "L" denotes Lower Wattage.	

Upgradeability	Upgradeable to two processors
----------------	-------------------------------


Chipset	Intel® 5520 Chipset
NOTE: For more information regarding Intel chipsets, please see the following URL: <a href="http://www.intel.com/products/server/chipsets/">http://www.intel.com/products/server/chipsets/</a> .	

Cache Memory	4 MB Level 3 cache (E5504)
	8 MB Level 3 cache (L5520, E5520, E5540)

Memory Protection	Advanced memory protection
-------------------	----------------------------

Memory	Type	DDR3 Registered (RDIMM) or Unbuffered (UDIMM)	
	Standard	4 GB	(2 x 2 GB)
		6 GB	(3 x 2 GB)
		12 GB	(6 x 2 GB)
	Maximum (RDIMM)	192 GB	(12 x 16 GB)
	Maximum (UDIMM)	24 GB	(12 x2 GB)
NOTE: Depending on the memory configuration and processor model, the memory speed may run at 1333MHz, 1066MHz, or 800MHz. Please see the Online Memory Configuration Tool at: <a href="http://www.hp.com/go/ddr3memory-configurator">www.hp.com/go/ddr3memory-configurator</a> .			
DDR3 memory options part number decoder			

Standard Features

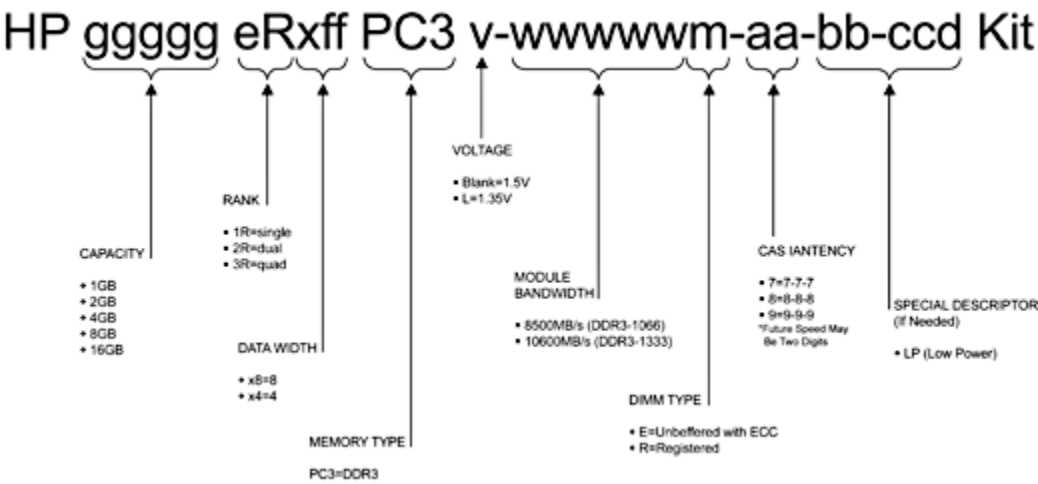

Network Controller      HP NC362i Integrated Dual Port Gigabit Server Adapter

Expansion Slots	Slot Number	Bus Speed	Bus Number*	Device Number**	Hot Plug (Y/N)	Notes
	1	x16 PCI-Express	6	0	N	Low Profile
	2	x8 PCI-Express	5	0	N	Full Length Full Height
	2	x8 PCI-Express	4	0	N	Full Length Full Height
	3	x4 PCI-Express	3	0	N	Full Length Full Height
	3	PCI-X***	Dynamic	1	N	Full Length Full Height
	3	PCI-X***	Dynamic	2	N	Full Length Full Height

NOTE: All slots can accept universal keyed PCI cards.

\* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

\*\* Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

\*\*\* PCI-X bus speed will be 100MHz in maximum and support two PCI-X/100MHz cards.

\*\*\*\* Slot 2 contains bus 4 and bus 5 because BIOS configures this x16 PCI-express.

NOTE: Slot to two x8 PCI-express slot for production riser, this is valid only on Option1: 2 PCIe2x8 full-length/full-height PCI-Express slots (Standard) or Option 4: 2 PCIe2x8 and 1 PCIe8 (4) full-length/full-height slots (Optional).

Standard Features

Storage Controller	4HDD Models	HP Embedded SATA RAID Controller (integrated into the south-bridge) supporting SW RAID 0,1,10 NOTE: Transfer rate up to 3.0 Gb/s SATA. HP Smart Array B110i SATA RAID NOTE: To enable RAID on Embedded SATA, use the HP Smart Array B110i SATA Raid controller, To enable use of the B110i, enter the ROM based setup utility(RBSU). The option for enabling RAID can be found in the Advanced section of the RBSU.
	8HDD Models	HP Smart Array P410/256MB Controller (RAID 0/1/1+0/5/5+0)
	12HDD Models	HP Smart Array P212/256MB Controller (RAID 0/1/1+0/5/5+0) NOTE: Available upgrades: 256MB with BBWC, 512MB with BBWC, Battery kit upgrade (for the 256MB cache), and Smart Array Advanced Pack (SAAP).
	NOTE: A diskette drive or virtual FDD using LO100 Advanced Pack is needed to install storage controller drivers during a Windows operating system installation from a CD. NOTE: A minimum of 256 MB cache, battery kit, and Smart Array Advanced Pack License Key upgrade (P/N: 516471-B21) is required to enable RAID 6, 6+0	

Storage	Diskette Drives	Via USB only
	Optical Drives	Optional HP Slim SATA DVD-ROM Optical Drive
		Optional HP Slim SATA DVD RW Optical Drive
	NOTE: Support in 4, 8, and 12 drive models. Optical drives can only be installed in 12 drive model and 25SFF drive bay system with rear option kit (P/N 515826-B21).	
	Drive Bays	Up to 14 Hot Plug SAS/SATA 3.5" drives
		Up to 25 Hot Plug SAS/SATA 2.5" drives
		NOTE: 4 Drive Models are Non-Hot Pluggable. Smart Array Controller must be added for Hot Plug drive capability. 4 Drive Models can be upgraded with the addition of a Smart Array Controller and a SAS/SATA Multi-lane cable (496013-B21).
		NOTE: The addition of a Smart Array Controller requires the addition of a SAS/SATA Multi-lane cable (P/N 496013-B21).

Maximum Internal Storage	Hot Plug 3.5" SATA	14.0TB	14 x 1TB
	Hot Plug 3.5" SAS	14.0TB	14 x 1TB
	Hot Plug 2.5" SATA	12.5TB	25 x 500GB
	Hot Plug 2.5" SAS	12.5TB	25 x 500GB

Standard Features

Interfaces	Network RJ-45 (Ethernet)	2 10/100/1000 NIC ports (plus 1 dedicated for the HP ProLiant Lights Out 100i Remote Management)
	Serial	1
	Graphics	1
	USB	5 total ports: (2) front, (2) rear, (1) optional internal <a href="#">NOTE: In order to connect a USB device internally, the internal USB Cable G6 Kit must be used (P/N 536769-B21).</a> <a href="#">NOTE: Please see the following URL for additional information regarding USB support:</a> <a href="http://h18004.www1.hp.com/products/servers/platforms/usb-support.html">http://h18004.www1.hp.com/products/servers/platforms/usb-support.html</a> .

Graphics	32MB* shared supporting all display resolutions up to 1600x1200 16bpp@75Hz <a href="#">NOTE: 8MB is dedicated to video memory.</a>
----------	---

Form Factor	Rack (2U), (3.5 in/8.89 cm)
-------------	-----------------------------

Embedded Manageability	HP ProLiant Onboard Administrator and LO100i Advanced	HP ProLiant Onboard Administrator Powered by Lights-Out 100i, simplifies server setup, control, and lights-out remote administration of ProLiant 100 Series servers and functions without additional software. It can be accessed from any location via LAN or Internet and works hand-in-hand with HP Systems Insight Manager (SIM), helping customers unlock the value of the ProLiant platform and deliver the highest possible quality of IT service to the business. Advanced Licenses are required for Virtual KVM and Virtual Media feature activation.
------------------------	---	--

- Key features of LO100i are:
- IPMI 2.0 & SMASH CLP support
  - ROM Setup Utility
  - Improvements to virtual media with the addition of USB 2.0 drives and protocol support for much faster transfer speeds and DVD-ROM support plus simplified virtual media (floppy and CD with no FTTTP server requirements)
  - Enhanced browser interface and embedded KVM over IP provides OS-independent remote graphical console
  - 24x7 Technical Support and Update (TSU) 1 year support and license upgrades included in Advanced license

[NOTE: For more information, see: http://www.hp.com/go/lo100](#)

HP Insight Control management software	HP Insight Control for Linux	HP Insight Control for Linux, as a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. The Insight Control for Linux suite installs and license software modules that are integrated into HP System Insight Manager.
--	------------------------------	--

The HP Insight Control suite for Linux (IC-Linux) serves environments requiring a Linux-based management consoles. See [www.hp.com/go/ic-linux](http://www.hp.com/go/ic-linux)





Standard Features

		<p>HP Insight Control suites include one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <a href="http://www.hp.com/services/insight">http://www.hp.com/services/insight</a></p>
Insight Control server deployment		<p>HP Insight Control server deployment is a deployment solution for HP ProLiant and Integrity servers hosted on a Windows CMS. It automates the process of deploying and provisioning server software, enabling companies to quickly and easily adapt to changing business demands. Insight Control server deployment includes software optimizations for HP servers, including the HP scripting toolkits, configuration jobs for leading industry-standard operating systems, sample unattended files, and HP server support packs that include software drivers, management agents, and important documentation. Deploying servers can be accomplished either through imaging or through scripting.</p> <p>Insight Control server deployment is hosted on a Windows server and is intended for heterogeneous environments deploying Windows, Linux, VMware ESX and Microsoft Hyper-V systems.</p> <p>Insight Control server deployment includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <a href="http://www.hp.com/services/insight">http://www.hp.com/services/insight</a>.</p>
Core Server Management Software	ProLiant 100 Series G6	<p>HP provides management solutions that are designed to simplify a server's installation, configuration, and maintenance throughout the entire server lifecycle. This provides the customers with higher levels of operational efficiency and highly reliable systems.</p> <p>While ProLiant 100 series G6 servers do not support the Insight Foundation Suite for ProLiant, they support a key subset of this important suite software tools and utilities which are very suitable for this class of server: SIM, SMH, agents, providers, and a SmartStart 'like' deployment CD called Easy Set-up which greatly simplifies server set-up. Additionally the DL100 and SL100 G6 models support the SmartStart Scripting Toolkit (SSSTK), an automated scalable deployment utility.</p> <p>Information on core management supported on ProLiant 100 series G6 servers can be found at these URLs:</p> <ul style="list-style-type: none"><li>• Core Management: <a href="http://www.hp.com/go/coremanagement">www.hp.com/go/coremanagement</a></li></ul> <p>HP ProLiant 100 series Easy Set-up CDs: <a href="http://www.hp.com/servers/easysetup">www.hp.com/servers/easysetup</a></p>
HP Systems Insight Manager		<p>HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms.</p>
Insight Management Agents		<ul style="list-style-type: none"><li>• HP Insight Management Agents and Insight Management Providers are available for HP Systems Insight Manager (SIM) Integration.</li></ul>



### Standard Features

ProLiant 100-series G6 servers can use the same SNMP based Insight Management Agents supported by other ProLiant servers. As a result, administrators can use HP Systems Insight Manager (SIM) 5.3 and greater to manage ProLiant 100-series G6 servers. Administrators can also use any other SNMP-based management tool. These agents are obtained as part of the ProLiant 100-series model-specific "Easy Set-up" CDs, or through: [www.hp.com/servers/easysetup](http://www.hp.com/servers/easysetup)

The following capabilities are enabled on the 100-series G6 servers by the SNMP agents:

- Health monitoring capabilities, including monitoring for drives, fans, network, power supplies, and temperature
- Alerting capabilities, including basic alert notification for Smart Array drive pre-failure only
- Performance monitoring capabilities providing information on processor, memory, disk free space, network utilization

**NOTE:** For additional information, please see:  
<http://www.hp.com/go/insight>

#### Easy Set-up CD

Easy Set-up CDs are available on all 100-series G6 servers and are also available as an ISO image web download. HP ProLiant Easy Set-up CDs provide easy, step-by-step, single and multi-server server utilities for the ProLiant 100-series G6 servers to streamline server setup for 100-series G6 servers. The user experience is consistent with SmartStart and offers the following capabilities:

- Boot environment and GUI
- Assisted Installation: Windows 2003 Server and Windows 2008 Server drivers
- Manual installation: Windows 2003 Server, Windows 2008 Server, and Linux drivers (specific OS support varies by server. Refer to each server's QuickSpecs for supported versions)
- HP Insight Diagnostics
- AutoRun
- Array Configuration Utility (ACU) has been combined with Array Diagnostics Utility (ADU) to offer both configuration of array controllers and storage devices and testing of array controller hardware
- SmartStart Scripting Toolkit (SSSTK) and Smart Components for software and drivers for DL100 and SL100 servers

**NOTE:** OS and SW available for Manual Installation are listed on each servers' QuickSpecs.

#### SmartStart Scripting Toolkit (SSSTK)

The SmartStart Scripting Toolkit is a server deployment product that delivers an unattended automated installation for high-volume server deployments. The SmartStart Scripting Toolkit includes a set of utilities for configuring and deploying servers in a customized, predictable, and unattended manner. These utilities enable you to duplicate the configuration of a source server on target servers with minimum user interaction.

The Toolkit is designed for IT experts with experience in scripting operating system installations and configuring ProLiant server hardware.

Standard Features

NOTE: For additional information, please see:  
<http://h18004.www1.hp.com/products/servers/management/toolkit/index.html>

Subscriber's Choice      Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change notifications for ProLiant products. Sign up at: <http://www.hp.com/go/subscriberschoice> and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.

ROMPaq, software and latest drivers      The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options; downloaded from Software and Drivers download pages website at: <http://www.hp.com/go/support> and from [www.hp.com/servers/easysetup](http://www.hp.com/servers/easysetup). Contains the following:

- HP Insight Management Agents for Systems Insight Manager (SIM) Integration
- HP Systems Management Homepage
- Array Configuration Utility (ACU)
- Array Diagnostics Utility (ADU)
- HP Insight Diagnostics

Industry Standard Compliance      ACPI V2.0 Compliant  
PCI 2.2 Compliant  
PXE Support  
WOL Support  
Microsoft® Logo certifications  
IPMI 2.0 Compliant

Security      Power-on password  
Setup password  
Diskette boot control  
Secure Sockets Layer (SSL)  
Secure Shell (SSH)

Security - Trusted Platform Module      The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline.

NOTE: For more information about TPM, including a white paper, go to [www.hp.com/go/TPM](http://www.hp.com/go/TPM)  
NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.  
NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.



## Standard Features

Server Power Cords	<p>One 6' Highline (IEC-IEC) power cord ships standard</p> <p>NOTE: HP ProLiant DL servers no longer ship standard with NEMA power cords (P/N 163719-002) that allow connection to 110V US wall outlets in a home or office. ProLiant DL servers are primarily connected to PDU's in data center racks so they now ship standard with a PDU power cord (416151-B21). If a user wishes to power a ProLiant DL server using a 110V receptacle (NEMA-15), the NEMA power cord (P/N 227099-001) must be ordered separately.</p> <p>If customers require a local power cord, they can check the power cord matrix for the appropriate cord. Please see the following power cord matrix: <a href="http://www.hp.com/go/powercordmatrix">http://www.hp.com/go/powercordmatrix</a></p> <p>NOTE: Rack models ship standard with an IEC cable.</p> <p>Localized cables included with geographic specific models in other world regions.</p>
UPS and PDU Power Cord Matrix	<p>Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: <a href="http://www.hp.com/products/powercords">www.hp.com/products/powercords</a>.</p>
Power Supply	<p>HP has a new design for ProLiant power. The new Common Slot Power Supply bay. This design provides the customer with commonality in power supplies across multiple platforms to save on the cost of spares and allows HP to offer multiple power solutions to fit the customers' needs. Many HP ProLiant Servers come with Common Slot, High Efficiency and Right-Size Power Supplies. Common Slot (CS) designates commonality of the power supply across multiple ProLiant servers. HP's new Common Slot power supplies are designed for highest efficiency to provide power efficiency without degrading performance of the ProLiant. Power Supplies will have efficiency ratings up to 92%. There are three Right Size power options available, depending on the configuration of your server. To make sure you select the correct power supply to meet your configuration, we suggest that you use the HP Power Advisor to decide the "Right-Size" for your configuration. All HP Common Slot power sources are UL, CE Mark Compliant, Hot Plug and Redundant.</p>
Common Slot ProLiant	<p>It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your needs. HP offers Power Supply Options:</p> <ul style="list-style-type: none"><li>• 460Watts, Common Slot,92% Efficiency</li><li>• 750Watts, Common Slot, 92% Efficiency</li></ul> <p>HP's ProLiant Common Slot Power supplies (460W &amp; 750W) meet multiple Energy Efficiency Initiatives. Climate Savers Computing Initiative GOLD, ECOS Consulting 80PLUS GOLD and plans on offering models that meet the Energy Star for Server requirements when they are published.</p> <p>HP's ProLiant Common Slot Power supplies (1200W) meet multiple Energy Efficiency Initiatives. Climate Savers Computing Initiative Bronze, ECOS Consulting 80PLUS Bronze Power Supply requirements.</p> <p>Redundant Power: Optional (1+ 1 or n+n redundant) power supplies can be purchased through power supply option kits.</p>
System Fans	<p>4 system fans ship standard; Non-hot plug, Non-redundant</p> <p>NOTE: Redundant fan kit (P/N 516009-B21) available for purchase.</p>

Standard Features

- Operating Systems and Virtualization Software
  - Microsoft Windows Server
  - Microsoft Windows Server Hyper-V
- Support for ProLiant Servers
  - Red Hat Enterprise Linux (RHEL)
  - SUSE Linux Enterprise Server (SLES)
  - Oracle Enterprise Linux (OEL)
  - Solaris 10 for x86/x64 based Systems
  - VMware ESX Server
  - Citrix Essentials for XenServer (Retail)

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/supportos> and our driver download page <http://www.hp.com/support/DL180G6>

Rack Airflow Requirements **Rack 10000 G2 series Cabinets**

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

Rack Kit	HP ProLiant DL180 rack models have fixed rails which provide support for racks with round mounting holes and tool-free support for racks with square mounting holes (including Compaq/HP 7000, 9000, 10000 and HP series), with an adjustment range of 26" - 36".
----------	---

Telco Rack Support	Support for all 2 and 4 post Telco racks and threaded hole racks requires an additional option kit from Rack Solutions. The Rack Solutions brackets can be purchased at: <a href="http://www.hp.com/go/rackandpower">www.hp.com/go/rackandpower</a> .
--------------------	---



### Standard Features

**Factory Express Portfolio** HP Factory Express offers configuration, customization, integration and deployment services for HP servers for Servers and Storage and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

---

**HP Enterprise Configuration** The HP eConfigure Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

---

**Service and Support** HP services provide total care and support expertise with committed response designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalize on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

**Recommended Service** - Simplify ProLiant solution implementation, maintenance and management.

- Support Service - 3-Year 24x7 4 hr Response service support coverage
- Deployment Service - Hardware Installation

**Enhanced Service** - Optimize service level to increase IT performance and availability

- Support Service - 3-Year 24x7 24 hr Call to repair service support coverage
- Support - 3-Year 24x7 6 hr Call to repair service support coverage
- Support Plus - 24x7 4 hr Response service support including OS coverage

Installation of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays.

For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

## Standard Features

<http://h20219.www2.hp.com/services/us/en/warranty/carepack-servers-proliant.html>

## HPC Interconnects

NOTE: High Performance Computing (HPC) interconnect technologies are available for the DL180 G6 under the Cluster Platform product portfolio. These high-speed interconnects are fully supported by HP when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPC Clusters with InfiniBand, Gigabit Ethernet: <http://www.hp.com/techservers/clusters/ucp/index.html>

---

HPC Interconnects	InfiniBand	PCI-Express adapters
	Gigabit Ethernet	Use embedded ports or optional 10GbE NICs



Models

Four Drive Serial ATA (SATA) Models

NOTE: Upgrading from 4 Non-Hot Plug SATA hard drives to 4 Hot Plug SATA/SAS hard drives requires the addition of a storage controller and one Internal mini-SAS cable (P/N 496013-B21).

NOTE: Upgrading to 8 Hot Plug SATA/SAS hard drives requires the addition of a HP 2U G6 8HDD LFF DL18X KIT (P/N 506924-B21), storage controller (Smart Array P410/256MB recommended), and two Internal SATA/SAS cables (mini-SAS cable (P/N 496013-B21).

HP DL180G6 E5504 2x2GB 4LFF 487502-xx1	Processor	Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)
	One of the following depending on model	Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2)
HP DL180G6 L5520 2x2GB 4LFF 487506-xx1	Cache Memory	4MB shared L3 cache (E5504)
	One of the following depending on model	8MB shared L3 cache (L5520)
	Memory	4GB (2 x 2GB) PC3-10600E (UDIMM)
	Network Controller	HP NC362i Integrated Dual Port Gigabit Server Adapter
	Storage Controller	Embedded SATA Raid Standard RAID 0,1,10
	Hard Drive	1x 160GB Hot Plug SATA
		NOTE: Hot-plug functionality requires the addition of a Smart Array controller.
	Internal Storage	4.0TB (4 x 1TB Hot Plug 3.5" SATA hard drives), Maximum 4.0TB (4 x 1TB Hot Plug 3.5" SAS hard drives), Maximum
	Optical Drive	None ship standard
	Power Supply	460W common slot, high efficiency power supply
	Form Factor	Rack (2U)

Eight Drive Serial ATA (SATA) Models

NOTE: Supports up to 8 Hot Plug SATA or SAS Hard Drives.

HP DL180G6 E5520 3x2GB 8LFF 487503-xx1	Processor	Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
	Cache Memory	8MB shared L3 cache
	Memory	6GB (3 x 2GB) PC3-10600E (UDIMM)
	Network Controller	HP NC362i Integrated Dual Port Gigabit Server Adapter
	Storage Controller	HP Smart Array P410 /256MB Controller (RAID 0/1/1+0/5/5+0)
		NOTE: A minimum of 256 MB cache, battery kit, and Smart Array Advanced Pack License Key upgrade (P/N 516471-B21) is required to enable RAID 6, 6+0
	Hard Drive	None ship standard
	Internal Storage	8.0TB (8 x 1TB Hot Plug 3.5" SATA hard drives), Maximum 8.0TB (8 x 1TB Hot Plug 3.5" SAS hard drives), Maximum
	Optical Drive	None ship standard
	Power Supply	460W common slot, high efficiency power supply
	Form Factor	Rack (2U)

Models

Twelve Drive Serial ATA (SATA) Models

NOTE: Internal Storage expandable to 14 SAS/SATA drives with 2 Rear Drive Option Kit (P/N 488234-B21)

HP DL180G6 E5540 6x2GB 12LFF US 487507-xx1	Processor	(2) Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
	One of the following depending on model	Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
HP DL180G6 E5520 3x2GB 12LFF 487508-xx1	Cache Memory	8MB shared L3 cache
	Memory	E5540: 12GB (6 x 2GB) PC3-10600R (RDIMM)
	One of the following depending on model	E5520: 6GB (3 x 2GB) PC3-10600E (UDIMM)
	Network Controller	HP NC362i Integrated Dual Port Gigabit Server Adapter
	Storage Controller	HP Smart Array P212 /256MB Controller (RAID 0/1/1+0/5/5+0)
		NOTE: The minimum of 256 MB cache, battery kit, and Smart Array Advanced Pack License Key upgrade (P/N 516471-B21) is required to enable RAID 6, 6+0
	Hard Drive	None ship standard (up to 12 Hot Plug SATA or SAS drives supported)
	Internal Storage	12.0TB (12 x 1TB Hot Plug 3.5" SATA hard drives), Maximum 12.0TB (12 x 1TB Hot Plug 3.5" SAS hard drives), Maximum NOTE: Internal Storage expandable to 14 SAS/SATA drives with 2 Rear Drive Option Kit (P/N 488234-B21)
	Optical Drive	None ship standard
	Power Supply	750W common slot, high efficiency power supply
	Form Factor	Rack (2U)

Country Code Key	xx = 00	U.S.
	xx = 29	Japan
	xx = 37	APD
	xx = 42	Europe
	xx = AA	PRC

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

Hot Plug Models	
HP ProLiant DL180 G6 Hot Plug SAS/SATA Rack CTO Chassis	507168-B21
Factory Integrated Model ships with:	
HP NC362i Integrated Dual Port Gigabit Server Adapter	
Three available PCI-Express slots:	
Slot 1: x16 low-profile/half-height slot	
Optional Slots 2, 3, & 4: 2x8 full-height/full length, 1x4 full-height/full length (Recommended)	
NOTE: Optional PCI-X option kit includes: Slot 1 and 2: full-length/full-height PCI-X 100. PCI-X slots are 64 bits; 133 MHz capable if only one PCI-X card is installed in the server.	
NOTE: Optional FL/FH option kit includes: Slot 1: full length/full height slot.	
One HP SATA Embedded Cable Kit	
One Highline IEC Power Cord	
4 Non-Hot Plug Fans	
Rack (2U), (3.5 in/8.89 cm)	
Tool-less Fixed Rails	

Step 2: Choose Required Options (only one of the following from each list unless othe noted)

Processors	Quad-Core Processors	
	Intel® Xeon® processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2), FIO Base	508344-L21
	NOTE: If 2 processors are desired, select one 508344-L21 and one 508344-B21.	
	Intel® Xeon® processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2), FIO Base	508343-L21
	NOTE: If 2 processors are desired, select one 508343-L21 and one 508343-B21.	
	Intel® Xeon® processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2), FIO Base	508342-L21
	NOTE: If 2 processors are desired, select one 508342-L21 and one 508342-B21.	
	Intel® Xeon® processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800), FIO Base	508341-L21
	NOTE: If 2 processors are desired, select one 508341-L21 and one 508341-B21.	

Configuration Information - Factory Integrated Models

Memory	Registered RDIMMs	
	HP 2GB 2Rx8 PC3-10600R-9 Kit	500656-B21
	HP 4GB 2Rx4 PC3-10600R-9 Kit	500658-B21
	HP 4GB 4Rx8 PC3-8500R-7 LP Kit	500660-B21
	HP 8GB 2Rx4 PC3-8500R-7 Kit	516423-B21
	HP 16GB 4Rx4 PC3-8500R-7 Kit	500666-B21
	Unregistered with ECC UDIMMs	
	HP 1GB 1Rx8 PC3-10600E-9 Kit	500668-B21
	HP 2GB 2Rx8 PC3-10600E-9 Kit	500670-B21
	<p>NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <a href="http://www.hp.com/go/ddr3memory-configurator">www.hp.com/go/ddr3memory-configurator</a>.</p> <p>NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <a href="http://h18004.www1.hp.com/products/servers/platforms/energyefficient/">http://h18004.www1.hp.com/products/servers/platforms/energyefficient/</a></p> <p>NOTE: There is a maximum support limitation of 8 ranks per memory channel (maximum of 2 quad rank DIMMs per channel)</p>	
Hard Drive Cage	HP 2U G6 4HDD CAGE Kit, FIO	506926-B21
	HP 2U G6 8HDD CAGE Kit, FIO	506927-B21
	HP 2U G6 12HDD CAGE Kit, FIO	506928-B21
	HP 2U 8SFF HDD CAGE & BKPLN G6 FIO	534958-B21
	HP 2U G6 25 SFF CAGE FIO Kit	516011-B21
	HP 2U Rear 2-Bay LFF Hard Drive Kit	488234-B21
Power Supply	<p>NOTE: Many HP ProLiant Servers now offer new power options, including Common Slot Power Supplies. These power supplies come in multiple power ratings and higher efficiency levels to offer the Right Size solution to fit your configuration. This provides improved power delivery and the advantage of reclaiming lost power. Prior to making a power supply selection it is "highly recommended" that the "HP Power Advisor" is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: <a href="http://www.hp.com/go/proliant-energy-efficient">www.hp.com/go/proliant-energy-efficient</a></p>	
	HP 460W CS HE Power Supply Kit	503296-B21
	HP 750W CS HE Power Supply Kit	512327-B21
	<p>CAUTION: Optional Power Supplies used for Redundancy "MUST" match the original supplied power supply. Upgrades for more power headroom, when replacing the original power supplies must match if purchased for redundancy. Option Kits contain optional power supply, an IEC power cable and PDU IEC cables. In ProLiant Servers that have more than one power slot (bay), same size power supplies are recommended. If non-matched power supplies are inserted you will get errors and operation will fail.</p>	

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options (only one from each list unless otherwise noted)

Rear DVD Kit	HP DL180G6 Rear DVD Cage Kit	515826-B21
	NOTE: The x16 low profile slot is not available when this option is configured.	
Storage Controller	HP P410/ZM FIO Smart Array Controller	462860-B21
	HP Smart Array P411/256 MB w/ Battery FIO	491193-B21
	HP Smart Array P410/256 MB w/ Battery FIO	491195-B21
	HP Smart Array P212/256 MB w/ Battery FIO	491191-B21
Power Supplies	HP 460W CS HE Power Supply Kit	503296-B21
	HP 750W CS HE Power Supply Kit	512327-B21

CAUTION: Optional Power Supplies used for Redundancy "MUST" match the original supplied power supply. Upgrades for more power headroom, when replacing the original power supplies must match if purchased for redundancy. Option Kits contain optional power supply, an IEC power cable and PDU IEC cables. In ProLiant Servers that have more than one power slot (bay), same size power supplies are recommended. If non-matched power supplies are inserted you will get errors and operation will fail.

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" sections below.

Core Options

NOTE: Some options may not be available for factory integration. Please contact an HP sales representative for additional information.

Unique Options	HP DL180G6 Redundant Fan Kit	516009-B21
	HP Dedicated Management Port Kit	516006-B21
	HP Internal USB Cable G6 Kit	536769-B21
	NOTE: This option required to connect a USB device internally.	
	HP DL180 G6 3PCI-E x8, Full Height Kit	577668-B21
	NOTE: This option provides two x8 full-length/full-height slots as well as an additional x8 (x4 electrically) slot. This allows the DL180G6 to have a maximum of four (4) slots.	
	HP PCI-X Full Riser DL180 G6 Kit	488230-B21
	NOTE: This option kit replaces the three internal expansion slots listed in step 1 base configuration.	
	NOTE: Optional PCI-X option kit includes: Slot 1: full-length/full-height PCI-X 100; Slot 2: Full length/Full-height PCI-X 100. PCI-X slots are 64 bits; 133 MHz capable if only one PCI-X card is installed in the server.	
	HP 2U G6 8HDD LFF DL18X KIT	506924-B21
	NOTE: Upgrading to 8 Hot Plug SATA/SAS hard drives requires the addition of a storage controller (Smart Array P410/256MB recommended), two Internal ATA/SAS cables, (mini-SAS cable (496013-B21).	
	HP DL180G6 Rear 2LFF Kit	488234-B21
	NOTE: Supports 12 hard drive server models only. Hard Drives not included.	
	NOTE: This option replaces the 2 Full Length, Full Height x8 PCIe slots.	
	HP KIT 2PCI-E x8, FH, DL180G6	497145-B21
	NOTE: This option provides 2 Full Length, Full Height x8 PCIe slots.	
	HP KIT PCI-E x16, DL180G6	497143-B21
	NOTE: This option replaces the 2 Full Length, Full Height x8 PCIe slots.	

Processor	Quad-Core Processors	
	Intel® Xeon® Processor L5520 (2.26 GHz, 8MB L3 Cache, 60W, DDR3-1066, HT, Turbo 1/1/2/2)	508344-B21
	Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)	508343-B21
	Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)	508342-B21
	Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)	508341-B21
	NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology.	
	NOTE: Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 4, 3, 2, and 1 cores active.	
	NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.	
	NOTE: For the Intel 5500 Series, the letter preceding the model number indicates the performance/wattage of the processor. "X" denotes High Performance/Wattage; "E" denotes Enterprise Performance/Wattage (Mainstream); and "L" denotes Lower Wattage.	

Core Options

Memory	Registered RDIMMs	
	HP 2GB 2Rx8 PC3-10600R-9 Kit	500656-B21
	HP 4GB 2Rx4 PC3-10600R-9 Kit	500658-B21
	HP 4GB 4Rx8 PC3-8500R-7 LP Kit	500660-B21
	HP 8GB 2Rx4 PC3-8500R-7 Kit	516423-B21
	HP 16GB 4Rx4 PC3-8500R-7 Kit	500666-B21
	Unregistered with ECC UDIMMs	
	HP 1GB 1Rx8 PC3-10600E-9 Kit	500668-B21
	HP 2GB 2Rx8 PC3-10600E-9 Kit	500670-B21
	<p>NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: <a href="http://www.hp.com/go/ddr3memory-configurator">www.hp.com/go/ddr3memory-configurator</a></p> <p>NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <a href="http://h18004.www1.hp.com/products/servers/platforms/energyefficient/">http://h18004.www1.hp.com/products/servers/platforms/energyefficient/</a></p>	
Optical Drives	HP Slim SATA DVD-ROM Optical Drive	481041-B21
	HP Slim SATA DVDRW Optical Drive	481043-B21
	<p>NOTE: Optical drives can be installed in front, on 4 &amp; 8 bay hard drive models.</p> <p>NOTE: Optical drives can be installed in 12 and 25 drive model with the addition of rear option kit (P/N 515826-B21).</p>	
Hard Drives	<p>NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.</p> <p>NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.</p>	
	SAS Hot Plug SFF Enterprise (ENT) Drives	
	HP 300GB 6G SAS 10K SFF DP ENT HDD	507127-B21
	HP 300GB 3G SAS 10K SFF DP ENT HDD	492620-B21
	HP 146GB 6G SAS 15K SFF DP ENT HDD	512547-B21
	HP 146GB 3G SAS 15K SFF DP ENT HDD	504062-B21
	HP 146GB 6G SAS 10K SFF DP ENT HDD	507125-B21
	HP 146GB 3G SAS 10K SFF DP ENT HDD	418367-B21
	HP 72GB 6G SAS 15K SFF DP ENT HDD	512545-B21
	HP 72GB 3G SAS 15K SFF DP ENT HDD	418371-B21
	SAS Hot Plug 3.5" Enterprise (ENT) Drives	
	<p>NOTE: 3G Hard Drives will operate at up to 3.0 Gb/s in 4 drive models that use the embedded controller.</p>	
	HP 600GB 6G SAS 15K 3.5" DP ENT HDD	516828-B21
	HP 450GB 6G SAS 15K 3.5" DP ENT HDD	516816-B21
	HP 450GB 3G 15K SAS 3.5" DP ENT HDD	454232-B21
	HP 300GB 6G SAS 15K 3.5" DP ENT HDD	516814-B21
	HP 300GB 3G SAS 15K 3.5" DP ENT HDD	416127-B21

Core Options

HP 146GB 3G SAS 15K 3.5" DP ENT HDD 384854-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/12244\\_div/12244\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html)  
(Worldwide)

NOTE: If selecting more than 4 hard drives or if using SAS hard drives, a Smart Array controller and two SAS/SATA cables (P/N 464830-B21) are required.

SAS Hot Plug SFF Midline (MDL) Drives  
HP 500GB 6G SAS 7.2K SFF DP MDL HDD 507610-B21

SAS Hot Plug 3.5" Midline (MDL) Drives  
NOTE: 3G Hard Drives will operate at up to 3.0 Gb/s in 4 drive models that use the embedded controller.

HP 1TB 3G SAS 7.2K 3.5" DP MDL HDD 461137-B21

HP 750GB 3G SAS 7.2K 3.5" DP MDL HDD 461135-B21

SATA Hot Plug SFF Midline (MDL) Drives  
HP 500GB 3G SATA 7.2K 2.5in MDL HDD 507750-B21

HP 160GB 3G SATA 7.2K 2.5in MDL HDD 530888-B21

SATA Hot Plug 3.5" Midline (MDL) Drives  
HP 1TB 3G SATA 7.2K 3.5" MDL HDD 454146-B21

HP 750GB 3G SATA 7.2K 3.5" MDL HDD 458930-B21

HP 500GB 3G SATA 7.2K 3.5" MDL HDD 458928-B21

HP 250GB 3G SATA 7.2K 3.5" MDL HDD 458926-B21

SATA Hot Plug 3.5" Entry (ETY) Drives  
HP 160GB 3G SATA 7.2K 3.5" ETY HDD 458945-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional specifications:  
[http://h18000.www1.hp.com/products/quickspecs/13021\\_div/13021\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html)  
(Worldwide)

SATA Hot Plug Midline (MDL) Solid State Drives  
HP 60GB 3G SATA 2.5in MDL 1y Wty SSD 572071-B21

HP 120GB 3G SATA 2.5in MDL 1y Wty SSD 572073-B21

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives  
HP 60GB 3G SATA 3.5in MDL 1y Wty SSD 570761-B21

HP 120GB 3G SATA 3.5in MDL 1y Wty SSD 570763-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/13415\\_div/13415\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html)  
(Worldwide)





## Core Options

Communications	HP NC112T PCIe Gigabit Server Adapter	503746-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
	NOTE: Does not support Windows 2000.	
	HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
	HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
	HP NC375T PCI Express Quad Port Gigabit Server Adapter	538696-B21
	HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21
	HP NC522SFP Dual Port 10GbE Server Adapter	468332-B21
	NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each NC522SFP adapter.	
NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.		
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/ProLiantNICs">www.hp.com/go/ProLiantNICs</a> .		

Additional Options

Remote Management	HP LO100i Advanced Pack, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates NOTE: For additional License Kits please see the Lights-Out 100i QuickSpecs at: <a href="http://www.hp.com/go/lo100">www.hp.com/go/lo100</a> .	530521-B21
HP Insight Software	HP Insight Control for Linux HP Insight Control for Linux, 1-server license, including one year of 24x7 Technical Support and Updates, Electronic HP Insight Control for Linux, No Media, 1-Server license, including one year of 24x7 Technical Support and Updates HP Insight Control for Linux, Media pack (DVD) - No licenses included NOTE: Media pack DVD contains HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Licenses must be acquired separately. NOTE: Licenses ship without media. The Media Kit for Insight Control for Linux can be ordered separately, or can be downloaded at: <a href="http://www.hp.com/go/ic-linux">http://www.hp.com/go/ic-linux</a> (click on Download button). NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key, and are available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent. NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service. NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html">http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html</a> HP Insight Control server deployment HP Insight Control server deployment Electronic License including 1 year 24x7 Technical Support and Updates HP Insight Control server deployment 1-Server License including 1 year 24x7 Technical Support and Updates NOTE: Licenses ship without media. The Insight Control Media Kit can be ordered separately, or can be downloaded at: <a href="http://www.hp.com/go/insightupdates">http://www.hp.com/go/insightupdates</a> . NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key, and is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent. NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service. NOTE: For additional license kits please see the Insight Control QuickSpecs at: <a href="http://h18004.www1.hp.com/products/quickspecs/12631_div/12631_div.html">http://h18004.www1.hp.com/products/quickspecs/12631_div/12631_div.html</a>	T9084BAE 464423-B22 464422-B22 T9082AAE 452151-B21
HP Graphic Card Power Adapter Kit	HP Graphic Card Power Adapter Kit NOTE: The kit is applicable for 4LFF, 8LFF and 8SFF cages . The Graphic Power Adapter Kit can support up to 150 Watts.	533955-B21

Additional Options

Security	HP Trusted Platform Module Option Kit	488069-B21
Storage Controllers	SAS Controllers	
	HP Smart Array P800	
	HP Smart Array P800/512 BBWC Controller	381513-B21
	HP Smart Array P212 Controller	
	HP P212/Zero Memory Smart Array Controller	462828-B21
	HP P212/256MB Smart Array Controller	462834-B21
	HP Smart Array P410 Controller	
	HP Smart Array P410/256MB Controller	462862-B21
	HP Smart Array P410/512MB BBWC Controller	462864-B21
	HP Smart Array P411 Controller	
	HP Smart Array P411/256MB Controller	462830-B21
	HP Smart Array P411/512MB BBWC	462832-B21
	Optional Upgrades	
	HP Int SAS/SATA Multi-Lane Cable Kit	464830-B21
	HP Mini SAS to Mini SAS 28in Cable Assy	496013-B21
	NOTE: Supports internal drives on the DL180 G6 with the Smart Array P800 Controller.	
	256 MB Cache Module	462968-B21
	NOTE: Supported on HP Smart Array P212 Controller only.	
	512MB BBWC	462967-B21
	NOTE: Supported on HP Smart Array P410 Controller and HP Smart Array P411 Controller only.	
	Battery Kit upgrade	462969-B21
	NOTE: To enable BBWC on the 256MB cache.	
	NOTE: Supported on HP Smart Array P212 Controller, HP Smart Array P410 Controller, and HP Smart Array P411 Controller only.	
	HP Smart Array Advanced Pack No Media 1-Server license including 1yr 24x7 Technical Support	516471-B21
	NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html">http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html</a> (Smart Array P800 Controller)	
	<a href="http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html">http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html</a> (Smart Array P212 Controller)	
	<a href="http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html">http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html</a> (Smart Array P410 Controller)	
	<a href="http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html">http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html</a> (Smart Array P411 Controller)	
	SAS HBA	

Additional Options

HP SC08Ge Host Bus Adapter

488765-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/13082\\_div/13082\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13082_div/13082_div.html)  
(SC08Ge HBA)

SCSI HBA

HP SC11Xe Host Bus Adapter

412911-B21

NOTE: Recommended HBA for SCSI tape drive connect.  
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/12566\\_div/12566\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html)  
(SCSI HBA)

HPC Specific Options	HP IB 4X DDR Conn-X PCI-e G2 Dual Port HCA	483514-B21
	HP IB 4X DDR PCI-e DUAL PORT HCA	448397-B21
	HP IB 4X QDR PCI-e G2 Dual Port HCA	517721-B21
	Qlogic IB 4X QDR PCI-e G2 Dual-port HC	583211-B21
	HP IB 4X QDR CX-2 PCI-e G2 Dual Port HCA	592520-B21
	HP IB 4X DDR CX-2 PCI-e G2 Dual Port HCA	592521-B21

NOTE: Please see the QuickSpecs for additional information:  
[http://h18000.www1.hp.com/products/quickspecs/13078\\_div/13078\\_div.html](http://h18000.www1.hp.com/products/quickspecs/13078_div/13078_div.html)

Tape Storage

NOTE: For the complete listing of Tape Drive offerings, please see:  
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

Tape Drives

USB Rack-Mount Tape Solutions

HP StorageWorks 1U USB Rack-Mount Kit with one DAT 160 USB Tape Drive

AG703A

NOTE: Pre-configured with one DAT 160 USB tape drive.  
SAS Rack-Mount Tape Solutions  
NOTE: HP recommends purchasing the HP Smart Array P212 (P/N 462828-B21) for a dedicated SAS HBA for tape.

HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive

EH847A

HP StorageWorks 1U SAS Rack-Mount Kit

AE459A

NOTE: Supports up to (2) half-height SAS tape drives.  
HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive

HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive

DW085A

NOTE: Mounts inside the 1U SAS Rack-Mount Kit (AE459A).  
NOTE: Mounts inside the 1U SAS Rack-Mount Kit (AE459A).  
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:  
[http://h18000.www1.hp.com/products/quickspecs/10854\\_div/10854\\_div.html](http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.html)  
(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>.

Tape Autoloaders



Additional Options

HP StorageWorks 1/8 G2 Tape Autoloader		
HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader		AK377A
HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader		AH558A
NOTE: Requires the HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit (AE166A).		
HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit		
NOTE: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions.		
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/automation">http://www.hp.com/go/automation</a> needed to create a complete solution; reference current compatibility information at: <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> .		
Tape Libraries		
HP StorageWorks MSL2024 Tape Library		
HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library		AK378A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SAS Drive Library		AH559A
HP StorageWorks MSL4048 Tape Library		
HP StorageWorks MSL4048 2 LTO-4 Ultrium 1760 SAS Drive Library		AK380A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library		AH560A
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/automation">http://www.hp.com/go/automation</a> needed to create a complete solution; reference current compatibility information at: <a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> .		

Disk-Based Backup	RDX Removable Disk Backup	
	HP StorageWorks RDX500 External Removable Disk Backup System	AJ935A
	NOTE: 500GB of Disk Storage.	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html">http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html</a>	
	HP D2D Backup System	
	HP StorageWorks D2D2502i Backup System	EJ001A
	NOTE: 2 TB raw capacity/1.5 TB useable capacity.	
	HP StorageWorks D2D2504i Backup System	EJ002A
	NOTE: 4 TB raw capacity/3 TB useable capacity.	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://www.hp.com/go/d2d">http://www.hp.com/go/d2d</a> .	

Additional Options

StorageWorks Options	StorageWorks Fibre Channel HBA	
	NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: <a href="http://h18006.www1.hp.com/storage/saninfrastructure/hba.html">http://h18006.www1.hp.com/storage/saninfrastructure/hba.html</a> .	
	Brocade Fibre Channel HBAs	
	HP 81B PCIe 8Gb FC Single Port HBA	AP769A
	HP 82B PCIe 8Gb FC Dual Port HBA	AP770A
	HP 41B PCIe 4Gb FC Single Port HBA	AP767A
	HP 42B PCIe 4Gb FC Dual Port HBA	AP768A
	Emulex Fibre Channel HBAs	
	HP StorageWorks 81E 8Gb SP PCIe FC HBA	AJ762A
	HP 82E 8Gb Dual-port PCIe FC HBA	AJ763A
	HP StorageWorks FC2142SR 4Gb PCIe HBA	A8002A
	HP StorageWorks FC2242SR Dual Channel 4Gb PCIe FC HBA	A8003A
	QLogic Fibre Channel HBAs	
	HP StorageWorks 81Q PCIe FC HBA	AK344A
	HP 82Q 8Gb Dual Port PCIe FC HBA	AJ764A
	HP StorageWorks FC1142SR 4Gb PCIe HBA	AE311A
	HP StorageWorks FC1242SR Dual Channel 4 Gb PCIe HBA	AE312A
	StorageWorks SCSI HBA	
	HP U320e SCSI Host Bus Adapter	AH627A
	NOTE: Recommended for MSL SCSI Tape Library connect.	

HP StorageWorks	MSA SAN Storage Arrays	
Modular Smart Array	HP StorageWorks 50 Modular Smart Array	364430-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <a href="http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.html">http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.html</a> (Worldwide)	
	HP StorageWorks MSA60 Array	418408-B21
	NOTE: Please see the QuickSpecs for additional options and configuration information at: <a href="http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html">http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html</a>	
	HP StorageWorks MSA70 Array	418800-B21
	NOTE: Please see the QuickSpecs for additional options and configuration information at: <a href="http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html">http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html</a>	

Additional Options

Uninterruptible Power Systems	HP Tower UPS	
	HP T1000v Uninterruptible Power System	
	HP T1000v UPS	AF443A
	NOTE: The T1000v is available in China and India only.	
	NOTE: Please see QuickSpecs for Technical Specifications and additional information:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/13130_div/13130_div.html">http://h18000.www1.hp.com/products/quickspecs/13130_div/13130_div.html</a> (Worldwide)	
	HP Rack-mountable UPS	
	HP R1.5 VA 1U UPS NA	AF419A
	HP R1.5 VA 1U UPS INTL	AF418A
	HP, R1.5kVA UPS, 1U, JPN/TW	AF421A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/12507_div/12507_div.html">http://h18000.www1.hp.com/products/quickspecs/12507_div/12507_div.html</a> (Worldwide)	
	HP R3000v UPS Uninterruptible Power System	
	HP R3000v UPS	AF444A
	NOTE: The R3000v is available in China and India only.	
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/13129_div/13129_div.html">http://h18000.www1.hp.com/products/quickspecs/13129_div/13129_div.html</a> (Worldwide)	
	NOTE: For additional information on sizing your server, please reference:	
	<a href="http://www.upssizer.com">http://www.upssizer.com</a>	
	NOTE: For additional information on HP Uninterruptible Power Systems please go to:	
HP Rack Series	<a href="http://www.hp.com/servers/rackups">http://www.hp.com/servers/rackups</a>	
	HP Rack 10000 G2 Series (Carbon/Graphite Metallic)	
	10642 G2 (42U) Rack Cabinet 1200mm Deep - Shock Pallet	AF034A
	10642 G2 (42U) Rack Cabinet 1200mm Deep - Pallet	AF038A
	10647 G2 (47U) Rack Cabinet 1200mm Deep - Shock Pallet	AF044A
	10647 G2 (47U) Rack Cabinet 1200mm Deep - Pallet	AF045A
	NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.	
	NOTE: Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:	
	<a href="http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html">http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html</a> (Worldwide)	
	NOTE: For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a> .	

Additional Options

HP Rack Options	HP KVM Switch Options	
	2x1x16 IP Console Switch with Virtual Media	AF601A
	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
	NOTE: Requires PS/2 and one USB port on server.	
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	HP 1x4 Console Switch	AF611A
	HP PS2 Server Console Cable, 6 foot, 2-Pack	AF612A
	HP USB Server Console Cable, 6 foot, 2-Pack	AF613A
	NOTE: required for supporting USB peripherals.	
	NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	HP Serial Console Server Options	
	HP 16 Port Serial Console Server (worldwide)	AF101A
	HP 48 Port Serial Console Server (worldwide)	AF102A
	0x2x16 KVM Server Console G2 Switch with Virtual Media and CAC	AF618A
	0x2x32 KVM Server Console G2 Switch with Virtual Media and CAC	AF619A
	1x1Ex8 KVM IP Console Switch G2 with Virtual Media and CAC	AF620A
	2x1Ex16 KVM IP Console Switch G2 with Virtual Media and CAC	AF621A
	4x1Ex32 KVM IP Console Switch G2 with Virtual Media and CAC	AF622A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
	NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	Rack Kits	
	HP Rack Cable Management Velcro Clips	379820-B21
<hr/>		
USB Options	HP External USB CD/DVD R/RW Optical Drive	FS943AA
	USB 1.44-MB External Diskette Drive	DC141B
	USB Floppy Drive	DC361B
	HP USB-PS/2 Mouse	DC369A
	HP Keyboard (USB) standard 2004	DT528A#xxx



## Additional Options

Service and Support Offerings (HP Care Pack Services)	Hardware Services 4-Hour On-site Service	
	13-Hour x 5-Day Coverage, 3 Years, Electronic	UH271E
	24-Hour x 7-Day Coverage, 3 Years, Electronic	UH272E
	Hardware Services Next Business Day On-Site Service	
	9-Hour x 5-Day Coverage, 3 Years, Electronic	UH270E
	Hardware Services 6-Hour Call to Repair On-Site Service	
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	UH273E
	Hardware Installation, Electronic	UH301E

NOTE: For more information, customer/resellers can contact:  
<http://www.hp.com/services/carepack>.

## Memory

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant DL180 G6

Standard Memory (depending on model)

4 GB (2 x 2 GB) PC3-10600E Unbuffered memory, with Advanced ECC Capabilities Memory installed.

6 GB (3 x 2 GB) PC3-10600E Unbuffered memory, with Advanced ECC Capabilities Memory installed.

12 GB (6 x 2 GB) PC3-10600R Registered memory, with Advanced ECC Capabilities Memory installed.

Maximum Memory

Up to 192 GB memory is available with the optional installation of PC3-8500R Registered DIMM memory kits.

**NOTE:** Charts do not represent all possible memory configurations.

DDR3 memory population guidelines

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:

[www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator)

Some DIMM installation guidelines are summarized below:

- For servers with twelve (12) memory slots
- There are three (3) channels per processor; six (6) channels per server
- There are two (2) DIMM slots for each memory channel; twelve (12) total slots
- Memory channel 1 consists of the two (2) DIMMs that are closest to the processor
- Memory channel 3 consists of the two (2) DIMMs that are furthest from the processor
- DIMM slots that are white should be populated first
- Do not mix Unbuffered memory (UDIMMs) with Registered memory (RDIMMs)
- Do not install DIMMs if the corresponding processor is not installed
- If only one processor is installed in a 2CPU system, only half of the DIMM slots are available
- To maximize performance, balance the total memory capacity between all installed processors
- It is not required, but it is recommended to load the channels similarly if possible
- You can only have up to eight (8) ranks installed per channel
- You can only install two quad-rank DIMMs per channel
- You can install two UDIMMs per channel; if available, the third slot in the channel must remain empty
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel
- Heaviest load (DIMM with most ranks) within a channel goes furthest from the chipset
- No mixing DIMM voltage; all DIMMs must be the same voltage

Memory

DIMM Type ->	Registered DIMMS (RDIMMs)						Unbuffered with ECC DIMMs (UDIMMs)	
DIMM Rank ->	Dual Rank (2R)				Quad Rank (4R)		Single Rank (1R)	Dual Rank (2R)
DIMM Capacity ->	2GB	4GB	8GB	8GB	4GB	16 GB	1GB	2GB
DIMM Native Speed (MHz) ->	1333	1333	1066	1333	1066	1066	1333	1333
SLOTS THAT CAN BE POPULATED								
12 slot servers	12	12	12	12	12	12	12	12
MAXIMUM CAPACITY (GB)								
12 slot servers	24	48	96	96	48	192	12	24
POPULATED DIMM SPEED (MHz)								
1 DIMM Per Channel	1333	1333	1066	1333	1066	1066	1333	1333
2 DIMM Per Channel	1066	1066	1066	1333*	800	800	1066	1066
NOTE: *Supported with BIOS update via ROM Based Setup Utility (RBSU). UDIMM support is on 12-slot server.								

NOTES:

- Mixing DIMM speeds is allowed, but the system processor speed rules always override the DIMM capabilities.
- If you do mix DIMM speeds, the memory bus will default to the minimum clock rate of all DIMMs in the system - even if the slower DIMM is on the other processor.
- If you install 1x 1066MHz DIMM in channel 1 and 1x 1333MHz DIMM in channel 2, you still run at 1066MHz.
- If you install 1x 1066MHz DIMM in channel 1 and 5x 1333MHz DIMMs with 1 DIMM Per Channel (DPC) in each of the other channels, you run at 1066MHz.
- If you install 3DPC in one channel (if applicable) and 1DPC in all other channels, you run at 800MHz.
- 95 Watt CPU's are required for 1333MHz DIMM speeds. All other CPU's are capable of up to 1066MHz.
- References to the above MHz speeds are for the various speeds of DDR3 DIMMs; 1333 refers to DDR3-1333, etc.

DIMM slot and configuration diagrams  
Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.

12 DIMM SLOTS (6 per CPU node)					
	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D	1	D	Chnl 1
	2	A	2	A	
Chnl 2	3	E	3	E	Chnl 2
	4	B	4	B	
Chnl 3	5	F	5	F	Chnl 3
	6	C	6	C	

Standard memory configuration (1 CPU model)

- 6GB, consisting of three (3) 2GB dual-rank PC3-10600 RDIMMs

Memory

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D: empty	1	D: empty	Chnl 1
	2	A: 2GB DIMM	2	A: empty	
Chnl 2	3	E: empty	3	E: empty	Chnl 2
	4	B: 2GB DIMM	4	B: empty	
Chnl 3	5	F: empty	5	F: empty	Chnl 3
	6	C: 2GB DIMM	6	C: empty	

Standard memory plus optional memory (1 CPU model)

- 30GB, consisting of three (3) 2GB RDIMMs plus three (3) 8GB RDIMMs
  - 3x 2GB dual-rank PC3-10600 RDIMMs
  - 3x 8GB dual-rank PC3-8500 RDIMMs

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D: 8GB DIMM	1	D: empty	Chnl 1
	2	A: 2GB DIMM	2	A: empty	
Chnl 2	3	E: 8GB DIMM	3	E: empty	Chnl 2
	4	B: 2GB DIMM	4	B: empty	
Chnl 3	5	F: 8GB DIMM	5	F: empty	Chnl 3
	6	C: 2GB DIMM	6	C: empty	

Standard memory replaced with optional memory (1 CPU model)  
RDIMM maximum configuration

- 96GB, consisting of six (6) 16GB quad-rank PC3-8500 RDIMMs

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D: 16GB DIMM	1	D: empty	Chnl 1
	2	A: 16GB DIMM	2	A: empty	
Chnl 2	3	E: 16GB DIMM	3	E: empty	Chnl 2
	4	B: 16GB DIMM	4	B: empty	
Chnl 3	5	I: 16GB DIMM	5	I: empty	Chnl 3
	6	C: 16GB DIMM	6	C: empty	

UDIMM maximum configuration (1 CPU model)

- 12GB, consisting of six (6) 2GB dual-rank PC3-10600 UDIMMs

Memory

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D: 2GB DIMM	1	D: empty	Chnl 1
	2	A: 2GB DIMM	2	A: empty	
Chnl 2	3	E: 2GB DIMM	3	E: empty	Chnl 2
	4	B: 2GB DIMM	4	B: empty	
Chnl 3	5	F: 2GB DIMM	5	F: empty	Chnl 3
	6	C: 2GB DIMM	6	C: empty	

Standard memory replaced with optional memory (2 CPU model)  
RDIMM maximum configuration

- 192GB, consisting of twelve (12) 16GB quad-rank PC3-8500 RDIMMs

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D: 16GB DIMM	1	D: 16GB DIMM	Chnl 1
	2	A: 16GB DIMM	2	A: 16GB DIMM	
Chnl 2	3	E: 16GB DIMM	3	E: 16GB DIMM	Chnl 2
	4	B: 16GB DIMM	4	B: 16GB DIMM	
Chnl 3	5	F: 16GB DIMM	5	F: 16GB DIMM	Chnl 3
	6	C: 16GB DIMM	6	C: 16GB DIMM	

UDIMM maximum configuration (2 CPU model)

- 24GB, consisting of twelve (12) 2GB dual-rank PC3-10600 UDIMMs

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	D: 2GB DIMM	1	D: 2GB DIMM	Chnl 1
	2	A: 2GB DIMM	2	A: 2GB DIMM	
Chnl 2	3	E: 2GB DIMM	3	E: 2GB DIMM	Chnl 2
	4	B: 2GB DIMM	4	B: 2GB DIMM	
Chnl 3	5	F: 2GB DIMM	5	F: 2GB DIMM	Chnl 3
	6	C: 2GB DIMM	6	C: 2GB DIMM	

NOTE: Capacity references are rounded to the common Gigabyte values.

- 1GB = 1024MB
- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB
- 16GB = 16384MB



## Memory

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:  
[www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator)

Memory	Registered RDIMMs	
	HP 2GB 2Rx8 PC3-10600R-9 Kit	500656-B21
	HP 4GB 2Rx4 PC3-10600R-9 Kit	500658-B21
	HP 4GB 4Rx8 PC3-8500R-7 LP Kit	500660-B21
	HP 8GB 2Rx4 PC3-8500R-7 Kit	516423-B21
	HP 16GB 4Rx4 PC3-8500R-7 Kit	500666-B21
	Unregistered with ECC UDIMMs	
	HP 1GB 1Rx8 PC3-10600E-9 Kit	500668-B21
	HP 2GB 2Rx8 PC3-10600E-9 Kit	500670-B21

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: [www.hp.com/go/ddr3memory-configurator](http://www.hp.com/go/ddr3memory-configurator).

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see:  
<http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>

Storage

8 Drive Cage with DVD-Drive bay



- 1-8    Eight 3.5" Hot Plug SAS/SATA Hard Drive Bays
- 9     DVD-ROM, DVD RW

12 Drive Cage



- 1-12   Twelve 3.5" Hot Plug SAS/SATA Hard Drive Bays

- 13-14   Two Rear 3.5" Hot Plus SAS/SATA Hard Drive Bays  
Not  
Shown

Drive Support

Removable Media

	Quantity Supported	Position Supported	Controller
DVD-ROM	Up to 1	9	Integrated IDE (ATAPI) (optional)
DVD RW	Up to 1	9	Integrated IDE (ATAPI) (optional)

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SATA Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 3G SATA 7.2K	Up to 8 with 8 drive cage	1-8	HP Smart Array P800/512 BBWC Controller
160GB 3G SATA 7.2K			HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller
	Up to 25 with 25 drive cage	1-25	HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
			NOTE: Smart Array P212 Controllers recommended.
			HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug 3.5" Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
750GB 3G SATA 7.2K			HP Smart Array P410/512 MB BBWC Controller

Storage

500GB 3G SATA 7.2K	Up to 14 with 12 drive cage + Rear Drive Cage	1-14	HP Smart Array P212/Zero Memory Controller
250GB 3G SATA 7.2K			HP Smart Array P212/256 MB Controller
			NOTE: Smart Array P212 Controllers recommended.
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug 3.5" Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
160GB 3G SATA 7.2K	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller
	Up to 14 with 12 drive cage + Rear Drive Cage	1-14	HP Smart Array P212/Zero Memory Controller HP Smart Array P212/256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
120GB 3.0G SATA SSD			HP Smart Array P410/512 MB BBWC Controller
	Up to 25 with 25 drive cage	1-25	HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
			HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller

SAS Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 6G SAS 7.2K	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller
	Up to 25 with 25 drive cage	1-25	HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SAS Hot Plug 3.5" Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SAS 7.2K	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
750GB 3G SAS 7.2K			HP Smart Array P410/512 MB BBWC Controller
	Up to 14 with 12 drive cage + Rear Drive Cage	1-14	HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller





Storage

SAS Hot Plug SFF Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
600GB 6G 15K	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
450GB 6G 15K			HP Smart Array P410/512 MB BBWC Controller
450GB 3G SAS 15K			
30GB 6G 15K	Up to 25 with 25 drive cage	1-25	HP Smart Array P212/Zero Memory Controller
300GB 3G SAS 15K			HP Smart Array P212/256 MB Controller
146GB 6G 15K			HP Smart Array P410/256 MB Controller
146GB 3G SAS 15K			HP Smart Array P410/512 MB BBWC Controller
72GB 6G 15K			
72GB 3G SAS 15K			

SAS Hot Plug 3.5" Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
600GB 6G SAS 15K DP	Up to 8 with 8 drive cage	1-8	HP Smart Array P410/256 MB Controller
450GB 6G SAS 15K DP			HP Smart Array P410/512 MB BBWC Controller
450GB 3G SAS 15K	Up to 14 with 12 drive cage + Rear Drive Cage	1-14	HP Smart Array P212/Zero Memory Controller
300GB 3G SAS 15K			HP Smart Array P212/256 MB Controller
146GB 3G SAS 15K			HP Smart Array P410/256 MB Controller
72GB 3G SAS 15K			HP Smart Array P410/512 MB BBWC Controller

External Storage

	Quantity Supported	Position Supported	Controller
50 Modular Smart Array	Up to 4	External	HP Smart Array P800/512 BBWC Controller
60 Modular Smart Array	Up to 4	External	HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
70 Modular Smart Array	Up to 8	External	HP Smart Array P800/512 BBWC Controller
			HP Smart Array P411/256 MB Controller
			HP Smart Array P411/512 BBWC Controller
	Up to 2	External	HP Smart Array P212 Zero Memory Controller
			HP Smart Array P212/256 MB Controller
	Up to 4	External	HP Smart Array P800/512 BBWC Controller
			HP Smart Array P411/256 MB Controller
			HP Smart Array P411/512 MB BBWC Controller

Tape and Disk-Based Backup

NOTE: For a complete listing of compatible tape and disk-based backup offerings, please visit: [www.hp.com/go/connect](http://www.hp.com/go/connect).

	Position Supported	Controller	Controller Part Number
Tape Drives, Internal SCSI	Rack Mount	HP SC11Xe Host Bus Adapter	412911-B21
LTO-1 Ultrium 232			
LTO-2 Ultrium 448			
LTO-3 Ultrium 920			
LTO-3 Ultrium 960			
LTO4 Ultrium 1760			



Storage

LTO-4 Ultrium 1840			
DAT 40			
DAT 72			
DAT 160			
1U Rack-Mount Kit			
3U Rack-Mount Kit			
Tape Drives, Internal USB Rack Mount	USB 2.0 Port		N/A
DAT 40 USB			
DAT 72 USB			
DAT 160 USB			
DAT 320 USB			
1U USB Rack-Mount Kit			
Tape Drives, Internal SAS Rack Mount	HP Smart Array P212/Zero Memory Controller		462828-B21
DAT 320 SAS			
DAT 160 SAS			
LTO-2 Ultrium 448 SAS			
LTO-3 Ultrium 920 SAS			
LTO-4 Ultrium 1760 SAS			
LTO-4 Ultrium 1840 SAS			
1U Rack-Mount Kit			
3U Rack-Mount Kit			
Tape Automation, External Rack Mount	HP SC11Xe Host Bus Adapter		412911-B21
SCSI			
DAT 72x10 Autoloader			
1/8 G2 Tape Autoloader	HP U320e SCSI Host Bus Adapter		AH627A
MSL2024	NOTE: Recommended for MSL tape libraries.		
MSL4048			
MSL 8096			
Tape Automation, Internal Rack Mount	HP Smart Array P212/Zero Memory Controller		462828-B21
SAS			
1/8 G2 Autoloader			
MSL2024			
MSL4048			
MSL 8096			
Tape Automation Internal Rack Mount	Please consult the EBS connectivity matrix at:		N/A
Fibre Channel	<a href="http://www.hp.com/go/ebs">http://www.hp.com/go/ebs</a> for detailed connectivity information.		
MSL2024			
MSL4048			
RDX Removable Disk	Rack Mount	USB 2.0 Port	N/A
Backup System, Internal			
USB			
RDX160			
RDX320			



Storage

RDX500

D2D Backup Systems network attach, iSCSI D2D2500i D2D4000i	Rack mount	Embedded Network Controller	N/A
---	------------	-----------------------------	-----

Power Specifications

HP 460W Power Supply							
Part Number - AC 460W PSU	503296-B21						
Input Voltage Range (Vrms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	208	200	220	230	240
Maximum Rated Output Wattage	460	460	460	460	460	460	460
Nominal Input Current (A rms)	5.5	4.5	2.6	2.5	2.4	2.3	2.2
Max Rated Input Wattage Rating (Watts)	526	520	505	505	503	503	503
Max. Rated VA (Volt-Amp)	548	542	527	527	524	524	524
Efficiency (%) at Max. Rated Output Wattage	87.5	88.5	91	91	91.5	91.5	91.5
Power Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Max. Inrush Current (A peak)	30	30	30	30	30	30	30
Max. Inrush Current duration (mS)	20	20	20	20	20	20	20
Maximum British Thermal Unit Rating (BTU-Hr)	1794	1773	1725	1725	1715	1715	1715

HP 750W Power Supply							
Part Number - AC 750W PSU	512327-B21						
Input Voltage Range (Vrms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	208	200	220	230	240
Maximum Rated Output Wattage	750	750	750	750	750	750	750
Nominal Input Current (A rms)	8.9	7.4	4.3	4.1	3.9	3.7	3.6
Max Rated Input Wattage Rating (Watts)	857	847	824	825	820	820	820
Max. Rated VA (Volt-Amp)	894	884	859	859	854	854	854
Efficiency (%) at Max. Rated Output Wattage	87.5	88.5	91	91	91.5	91.5	91.5
Power Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Max. Inrush Current (A peak)	30	30	30	30	30	30	30
Max. Inrush Current duration (mS)	20	20	20	20	20	20	20
Maximum British Thermal Unit Rating (BTU-Hr)	2925	2892	2812	2812	2797	2797	2797

Optional Country Power Cords and Jumper Cords

WW	HP 2m 15A C20 C13 Universal Jumper Cord	AF590A
Brazil	HP 1.83m 10A C13 NBR14136 Power Cord	AF591A

Technical Specifications

System Unit	Dimensions (H x W x D) (with bezel)		3.45" x 17.64" x 28.23" in (8.76 x 44.80 x 71.71 cm)		
	Weight (approximate)	Maximum (all hard drives, power supplies, and processors installed)	45.0 lb (16.80 kg)		
		Minimum (one hard drive, power supply, and processor installed)	32.0 lb (11.94 kg)		
	Input Requirements (per power supply)	Rated Line Voltage	90 - 132 VAC, 180 - 264 V		
		Rated Input Current	460 Watt	7.1 A (at 120 VAC) 3.5 A (at 240 VAC)	
			750 Watt	7.4 A (at 120 VAC) 3.6 A (at 240 VAC)	
			Rated Input Frequency	50 to 60 Hz	
			Rated Input Power	460 & 750 watt - 852 W	
	BTU Rating	Maximum	460 Watt	1773 BTU/hr (at 120 VAC) 1715 BTU/hr (at 240 VAC)	
			750 Watts	2892 BTU/hr (at 120 VAC) 2797 BTU/hr (at 240 VAC)	
Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: <a href="http://www.hp.com/go/proliant-energy-efficient">www.hp.com/go/proliant-energy-efficient</a>				
	<ul style="list-style-type: none"><li>• Click on the system of interest. Example: DL180 G6</li><li>• Follow the instructions of the next screens.</li></ul>				
Power Supply Output (per power supply)	Rated Steady-State Power	460 W (at 100 VAC) 750 W (at 100 VAC) 460 W (at 200 VAC) 750 W (at 200 VAC)			
		Maximum Peak Power	460 W (at 100 VAC) 750 W (at 100 VAC) 460 W (at 200 VAC) 750 W (at 200 VAC)		
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.			

Technical Specifications

		System performance may be reduced if operating with a fan fault or above 30°C (86°F).
	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	Idle	
	LWAd	5.3 B
	LpAm	38 dBA
	Operating	
	LWAd	5.3 B
	LpAm	38 dBA
NC362i Integrated Dual Port Gigabit Server Adapter	Network Interface	Integrated 10/100/1000BASE-T Transceiver
		Combines a triple-speed IEEE 802.3TM - Compliant Media Access Controller (MAC) with a triple-speed Ethernet transceiver.
	Data Transfer Method	Compliant to x1 PCIe Specification
Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
	10Base-T (Full-Duplex)	20 Mb/s
	100Base-TX (Half-Duplex)	100 Mb/s
	100Base-TX (Full-Duplex)	200 Mb/s
	1000Base-TX (Half and Full-Duplex)	2000 Mb/s
Connector	RJ-45	
Cable Support	Performs all the physical layer functions for 10BASE-T, 100BASE-T, and 1000BASE-T Ethernet on standard Category 5 UT	

Technical Specifications

HP 160GB 3G SATA 7.2K 3.5" ETY HDD 458945-B21	Capacity	160,041MB	
	Height	1.04 in (26.4 mm)	
	Width	4.36 in (110.7 mm)	
	Depth	7.25 in (184.2 mm)	
	Interface	Serial ATA	
	Transfer Rate (Maximum)	3Gb/s	
	Native Command Queuing	Supported	
	Seek Time	Single Track	2.0 ms
	(typical reads, including settling)	Average	<11 ms
		Full-Stroke	23.0 ms
	Physical Configuration	Rotational Speed	7,200 rpm
		Bytes/Sector	512
		Logical Blocks	312,581,808
	Operating Temperature	41° to 131° F (5° to 55° C)	

---

Smart Array P212 Controller	Disk Drive and Enclosure	3G SAS (Serial Attached SCSI)	
	Interface	1.5G SATA (Serial ATA)	
	SAS Connectors	1 internal/1 external (Mini-SAS) x8 wide port connectors	
	Cache Memory Speed	DDR-2/533 MHz with 40 or 72-bit wide bus provides up to 4.2 GB/s maximum bandwidth.	
	Server Interface	x8 2.5G PCIe 2.0 provides 2GB/s maximum bandwidth.	
	SAS Speed	x8 3G SAS provides 2.4GB/s maximum bandwidth.	
	Cache Memory	40-bit 256MB ECC protected cache; transportable with battery-backed upgrade.	
		NOTE: The 256MB cache is not battery-backed or transportable.	
	Logical Drives Supported	Up to 32 logical volumes	
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space	
RAID Support	RAID 6, 6+0 (Advanced Data Guarding)		
	NOTE: A minimum of 256 MB cache, battery kit, and Smart Array Advanced Pack License Key upgrade is required to enable RAID 6, 6+0		
	RAID 5, 5+0 (Distributed Data Guarding)		
	NOTE: The 256 MB & Battery Kit upgrade is required to enable RAID 5, 5+0 support		
	RAID 1, 1+0 (Striping & Mirroring)		
	RAID 0 (Striping)		

Technical Specifications

Smart Array P410/410i Controller	Disk Drive and Enclosure Interface	6Gb/s SAS (Serial Attached SCSI)
	SAS Connectors	3Gb/s SATA (Serial ATA)
	Cache Memory Speed	2 internal (Mini-SAS) x8 wide port connectors
	Server Interface	DDR2-533MHz with 40 or 72-bit wide bus provides up to 4.2 GB/s maximum bandwidth.
	SAS Speed	x8 2.5G PCIe 2.0 provides 2GB/s maximum bandwidth
	Cache Memory	x8 6Gb/s SAS provides 24.8GB/s maximum bandwidth
	Logical Drives Supported	40-bit 256MB ECC protected cache (72-bit 512MB BBWC module upgrades available); transportable with battery-backed upgrade
	Host Memory Addressing	Up to 64 logical drives
	RAID Support	64-bit, supporting greater than 4GB server memory space
		RAID 6, 6+0 (Advanced Data Guarding)
		NOTE: The minimum of 256 MB cache, battery kit, and Smart Array Advanced Pack License Key upgrade is required to enable RAID 6, 6+0
		RAID 5, 5+0 (Distributed Data Guarding)
		NOTE: The 256 MB is required to enable RAID 5, 5+0 support of the Smart Array P410i
		RAID 1+0 (Striping & Mirroring)
		RAID 0 (Striping)

Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> . To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> . These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2009 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.  
Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

